


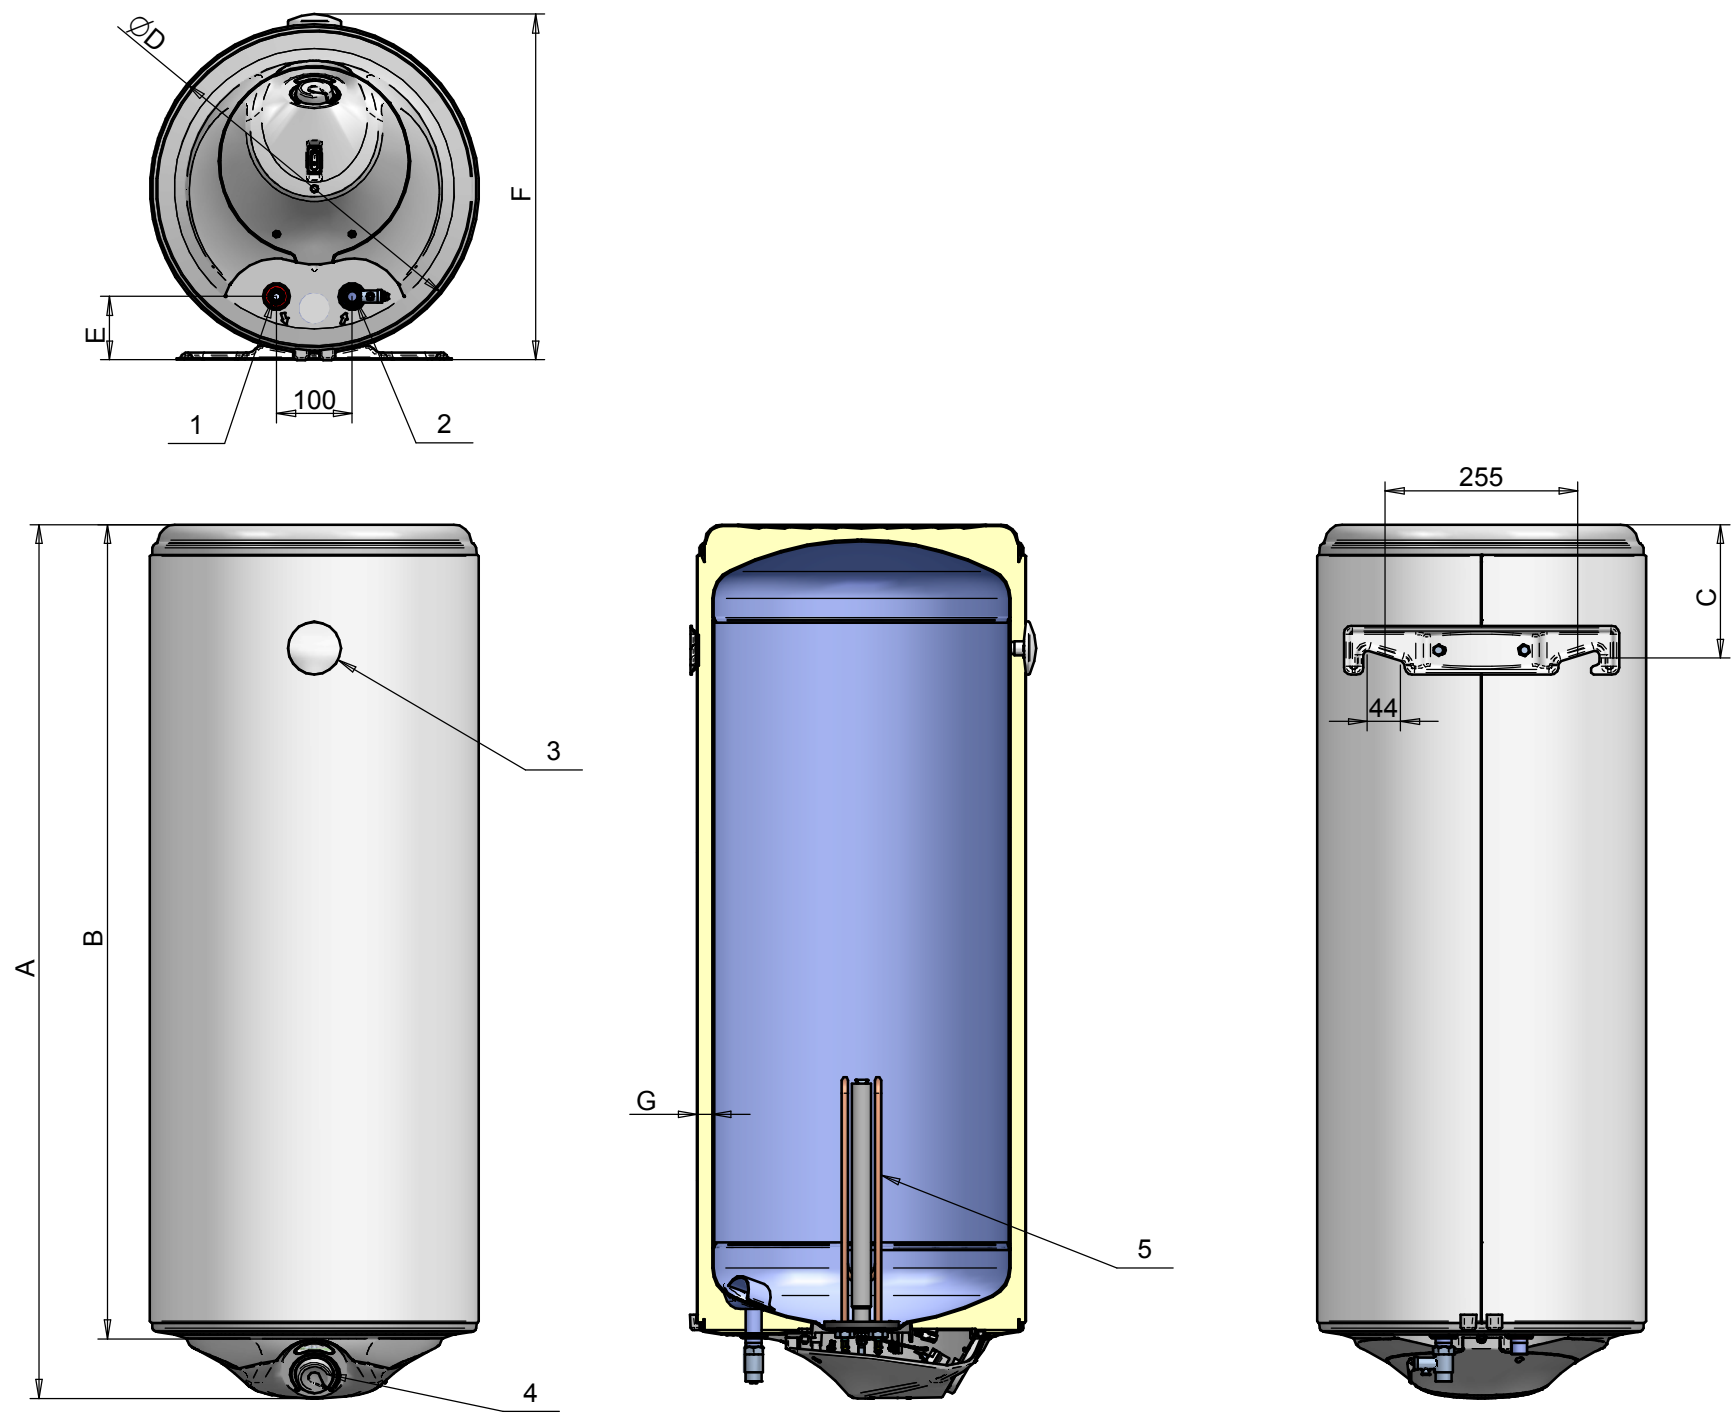

WATER HEATERS "STYLE" FOR VERTICAL MOUNTING ON THE WALL						
CHARACTERISTICS						
Model	...	72267W	72268W	72265W	72270W	72266W
Rated volume	L	50	80	80	100	120
Rated presure	MPa	0,8	0,8	0,8	0,8	0,8
Rated voltage	V~	230	230	230	230	230
Rated electrical power	kW	1,5; 2,0; 3,0	1,5; 2,0; 3,0	1,5; 2,0; 3,0	1,5; 2,0; 3,0	1,5; 2,0; 3,0
Warm-up time from 12-75 °C	h	2,5; 1,87; 1,25	4 ; 3; 2	4 ; 3; 2	5 ; 3,7; 2,5	6 ; 4,5; 3
MIX 37 °C (temperature of the water in the water tank: 75 °C; water temperature of supply water: 12 °C)	L	126	195	195	250	297
Weight when empty	kg	15	20.5	20	23.5	27.5
CONNECTIONS						
1: Hot water outlet		G1/2 M	G1/2 M	G1/2 M	G1/2 M	G1/2 M
2: Cold water inlet - Drain		G1/2 M	G1/2 M	G1/2 M	G1/2 M	G1/2 M
3: Temperature indicator		-	-	-	-	-
4: Control panel		-	-	-	-	-
5: Flange with heating element		-	-	-	-	-
DIMENSIONS						
A	mm	750	1065	825	1000	1165
B	mm	665	980	740	915	1080
C	mm	145	145	175	175	175
D	mm	360	360	435	435	435
E	mm	70	70	85	85	85
F	mm	380	380	455	455	455
G	mm	20	20	20	20	20
M	mm	-	-	-	-	-