

- Contenitori in 3 pezzi.
- 3-piece housings.
- Conteneurs en 3 pièces.
- Dreiteilige Gehäuse.

mod. 103

Valvola di sfogo pressione in plastica/Plastic pressure relief valve/Purge pression en plastique/Plastik-Auslassventil

Ref.	Ingressi/Inlet/Entrées/Anschlüsse	Diam./Ø	Vaso/Bowl/Bol/Behälter
1 103	Inserti ottone/Brass inserts/Inserts laiton/Messing-Anschlüsse	3/4"-1" (BSP)	9,3/4"/SAN-PC-PP
2 103	Inserti ottone/Brass inserts/Inserts laiton/Messing-Anschlüsse	3/4"-1" (BSP)	20"/SAN-PC-PP


mod. 203

Valvola di sfogo pressione in plastica/Plastic pressure relief valve/Purge pression en plastique/Plastik-Auslassventil

Ref.	Ingressi/Inlet/Entrées/Anschlüsse	Diam./Ø	Vaso/Bowl/Bol/Behälter
3 203	Plastica/Plastic/Plastique/Plastik	3/4"-1" (BSP-NPT)	9,3/4"/SAN-PC-PP
4 203	Plastica/Plastic/Plastique/Plastik	3/4"-1" (BSP-NPT)	20"/SAN-PC-PP

Dati tecnici/Technical data/Données techniques/Technische Angaben

Testa/Head/Tête/Kopf	Polipropilene talco/Talc polypropylene/Polypropylène talc/Talk Polypropylen
Ghiera/Ring-nut/Bague/Nutmutter	Polipropilene talco/Talc polypropylene/Polypropylène talc/Talk Polypropylen
Vaso/Bowl/Bol/Behälter	SAN-PC Trasparente/Clear transparent/Transparent/durchsichtig PP Opaco bianco/White opaque/Blanc opaque/weiß undurchsichtig
O-ring	NBR
Pressione max. d'esercizio/Max. working pressure/Pression max. en service/Max. Betriebsdruck	8,6 bar (125 psi)
Temperatura max. servizio continuo/Max. temperature continuous service/ Température max. en service continu/Max. Temperatur beim Dauerbetrieb	40° C

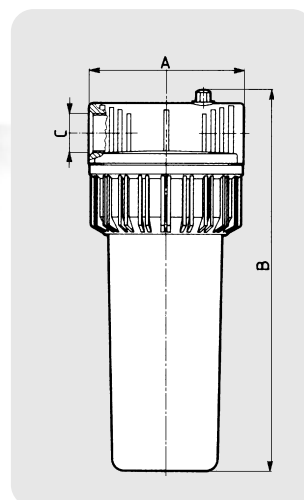

Mod.	A mm	B mm	C BSP-NPT	Imballo - Packing		
No.	kg	m³				
1 103 - 9 3/4"	126	318	3/4" - 1"	12	12.5	0.086
2 103 - 20"	126	594	3/4" - 1"	1	1.7	0.014
3 203 - 9 3/4"	126	318	3/4" - 1"	12	11.6	0.086
4 203 - 20"	126	594	3/4" - 1"	1	1.6	0.014